

PMCS15A, PMCS17A, and PMCS19A Monitors

15-/17-/19-INCH COLOR, SUPER-HIGH RESOLUTION

Product Features


- Super-High Resolution
 - PMCS15A and PMCS17A - 700 TV Lines
 - PMCS19A - 800 TV Lines
- Computer Grade Picture Tube
- Front Panel Controls
- Auto-Ranging 90-260 VAC Input
- Auto-Sensing NTSC/PAL
- Built-in Speaker
- Video and Audio Input and Output
- S-VHS Input for Separate Y-C Signals
- Rack Mountable



If your application demands crisp, detailed images, Pelco's super-high resolution monitors are the best choice for you. The **PMCS15A**, **PMCS17A** and **PMCS19A** monitors have a computer grade picture tube capable of producing a horizontal resolution of 700/800 TV lines. Standard high-resolution monitors produce only about 350 TV lines.

The super-high resolution of the **PMCS15A**, **PMCS17A** and **PMCS19A** allow you to take full advantage of today's digital imaging surveillance equipment including S-video output devices, like Pelco's Genex® Series multiplexer.

The **PMCS15A**, **PMCS17A**, and **PMCS19A** can be used in desktop applications or rack mounted. Controls for brightness, color, contrast, and volume are located on the front of the monitor. The monitors support NTSC and PAL video formats, as well as 120 VAC and 230 VAC input power.

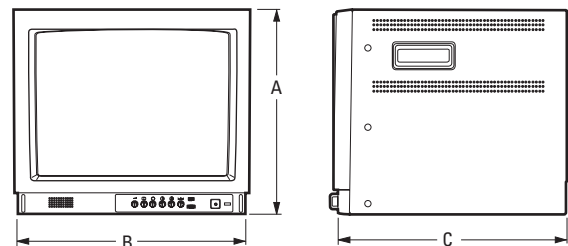

MODEL	A	B	C
PMCS15A	12.87 (32.69)	14.00 (35.56)	15.00 (38.10)
PMCS17A	14.50 (36.83)	16.00 (40.64)	16.00 (40.64)
PMCS19A	16.00 (40.64)	17.37 (44.13)	17.50 (44.45)

NOTE: VALUES IN PARENTHESES ARE CENTIMETERS; ALL OTHERS ARE INCHES.



TECHNICAL SPECIFICATIONS

MODELS

PMCS15A	Color monitor, 15-inch (38.10 cm) picture display, NTSC or PAL, autosensing
PMCS17A	Color monitor, 17-inch (43.18 cm) picture display, NTSC or PAL, autosensing
PMCS19A	Color monitor, 19-inch (48.26 cm) picture display, NTSC or PAL, autosensing

ELECTRICAL

Input Voltage	90-260 VAC, 50/60 Hz autoranging
Power Consumption	
PMCS15A	70 watts
PMCS17A	95 watts
PMCS19A	90 watts
Horizontal Resolution	
PMCS15A	700 TV lines
PMCS17A	700 TV lines
PMCS19A	800 TV lines
Viewable Picture Size	
PMCS15A	14-inch diagonal
PMCS17A	16-inch diagonal
PMCS19A	18-inch diagonal
Sweep Linearity	10%
Speaker Output	1.0 watt (-3 dBV)

GENERAL

Input/Output	
Video	2 inputs, BNC, 75 ohms or Hi-Z 2 loop-through outputs
Audio	2 inputs, RCA, Hi-Z 2 loop-through outputs
S-Video	1 input, DIN 1 loop-through output
Construction	Steel cabinet
Finish	Black with black bezel around screen
Unit Weight	
PMCS15A	35 lb (15.8 kg)
PMCS17A	43 lb (19.5 kg)
PMCS19A	53 lb (24.0 kg)
Shipping Weight	
PMCS15A	38 lb (17.2 kg)
PMCS17A	48 lb (21.7 kg)
PMCS19A	60 lb (27.2 kg)

ENVIRONMENTAL

Operating Temperature	32° to 106°F (0° to 41°C)
Humidity	0% to 90%, noncondensing

CERTIFICATIONS

PMCS15A	
• CE, Class B	
• FCC, Class B	
• UL/cUL Listed	
PMCS17A/PMCS19A	
• CE, Class B	
• FCC, Class B	
• ETL listed	
• ETL listed for Canada	
• FDA	
• EMI compliance	

RECOMMENDED MOUNTS

RMQ14T	Bolt on rack ears (7 RUs) with handles for PMCS15A monitor. Adapts monitor to standard 19" EIA rack.
RMQ17T	Same as RMQ14T except for use with PMCS17A monitor (8 RUs).
RMA14T	Rack kit (8 RUs) for mounting one PMCS15A monitor in a 19" W (48.26 cm) rack.
RMA17T	Rack kit (9 RUs) for mounting one PMCS17A monitor in a 19" W (48.26 cm) rack.
RMA19T	Rack kit (10 RUs) for mounting one PMCS19A monitor in a 19" W (48.26 cm) rack.
MR5000M	Viewing system ceiling monitor mount for PMCS15A and PMCS17A monitors.
MR5000L	Viewing system ceiling monitor mount for PMCS19A monitor.



Pelco, Inc. Worldwide Headquarters:

3500 Pelco Way, Clovis, California 93612-5699 USA

USA & Canada Tel: (800) 289-9100 • FAX: (800) 289-9150

International Tel: +1 (559) 292-1981 • FAX: +1 (559) 348-1120

www.pelco.com

Pelco, the Pelco logo, and Genex are registered trademarks of Pelco, Inc. Product specifications and availability subject to change without notice. ©Copyright 2004, Pelco, Inc. All rights reserved.